

↑ LOOP CHAIN

Innovated daisy chain for aid climbing, rock and multi-pitch climbing. Thanks to its design it eliminates the risks of classic daisy chain.


DESCRIPTION

First loop adapted for connection to the harness with strap reversal.

Can be threaded through both tie-in points without pulling them together.

Special 12 mm webbing combining PAD and Dyneema® materials provides strength, durability and light weight.

The construction of the individual loops guarantees maximum safety with a strength of 22 kN in each loop.

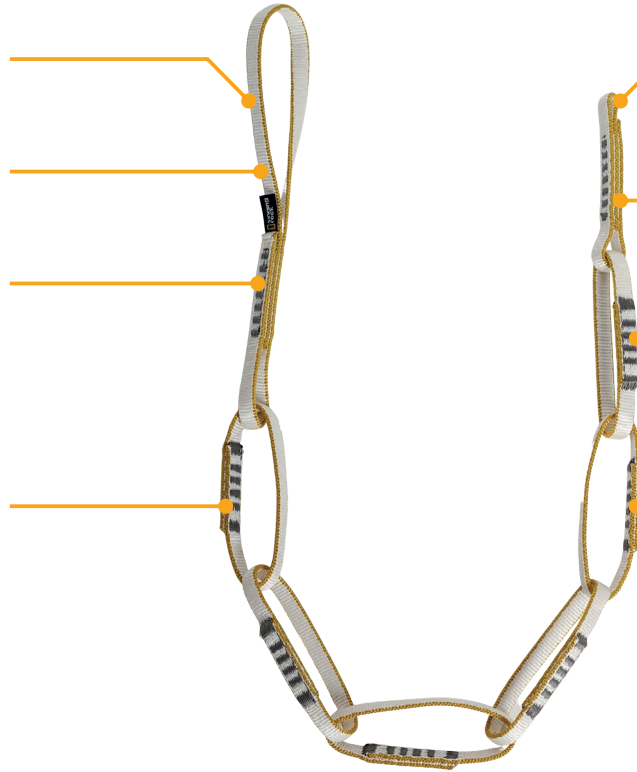

Stitching on the last eye fixes the carabiner in the correct position or prevents it from twisting.

It is also useful for setting the desired distance between the rappel device and the harness.

Can be shortened for desired distance between the anchor point and the harness.

LOOP CHAIN can be used as an anchor sling.

KEY FEATURES

- excellent sling for aid, multi-pitch and rock climbing
- a strength of 22 kN in each loop

STANDARDS

CE 1019


EN 566



FEATURES



22 kN



100 cm
39 in



75 g / 2.6 oz



3
YEARS
warranty

MATERIALS



- 80 % Dyneema®
- 15 % PAD
- 5 % PES

TECHNICAL DATA



COMPARISON

LOOP CHAIN – SAFETY CHAIN

- 12 mm webbing (PAD and Dyneema®) instead of 16 mm webbing (PAD)
- the construction of the individual loops with a strength of 22 kN in each loop
- available in one length 100 cm



SAFETY CHAIN C2419X

MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



beware of salt



beware of UV



beware of chemicals



washing



drying




read instructions

OTHER VIEWS



RELATED PRODUCTS

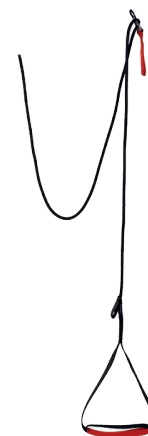SAFETY CHAIN
C2419REGULATOR
C2152BR00JACOB DYNEEMA
C2151BY00FOOTER XP
W1051BX

| | | | | |
|--------|----------------|-----------|--------|-----------|
| LENGTH | 120/140 cm | 18–136 cm | 140 cm | 30–170 cm |
| WIDTH | 16 mm | 20 mm | - | 6 mm |
| WEIGHT | 102 g (120 cm) | 90 g | 140 g | 90 g |