



Sport climbing harness providing maximum comfort, low weight and freedom of movement. Designed for sport routes or wherever you want to climb light.

DESCRIPTION

Belay loop 12 mm wide with strength 15 kN.

Abrasion resistance fabric at tie-in points for longer lifetime of the harness.

Fixed bridge between the leg loops provides a greater safety in case of incorrect tying.

Flexible leg loops with elastic straps adapt to the user's legs.



Rear haul loop with a load capacity 30 kg.

Ergonomic braided gear loops are shaped to facilitate easy handling and to provide enough space for your climbing gear.

Unique, patented Rock&Lock buckle is made of stainless steel to increase corrosion resistance.

For both leg loops and waist belt the variable width webbing is used.

KEY FEATURES

- Ergonomic construction combines maximum comfort and low weight.

STANDARDS

CE 1019
EN 12277, type C

FEATURES



UIAA



size M
335 g








3 YEARS
guarantee

MATERIALS




- 66 % PAD
- 16 % steel
- 11 % EVA foam
- 7 % PES

TECHNICAL DATA

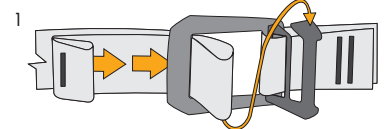

TECHNICAL DATA

Power distribution at the waist:

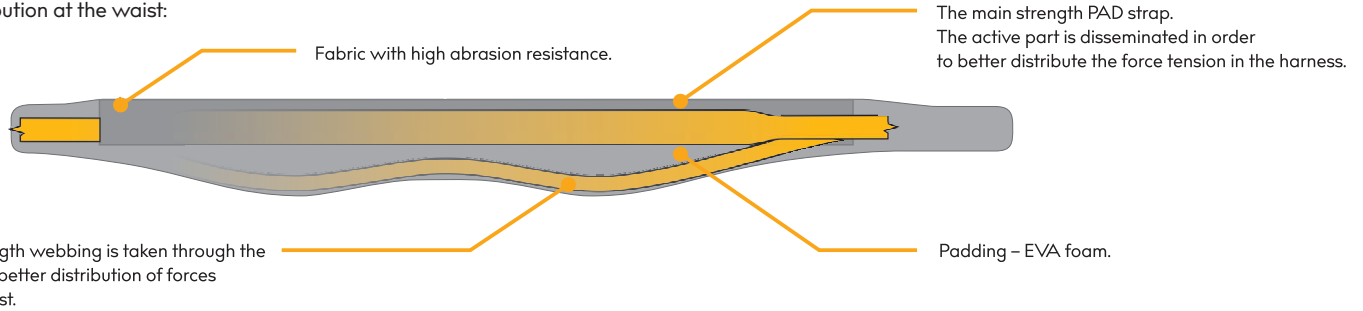

COMPARISON

ONYX C5059 (old) vs. ONYX C5071 (new)

- More durable reinforced tie-in points for longer lifetime of the harness.
- Rear haul loop with a load capacity 30 kg.
- 5 g lighter



ONYX C5059

OTHER VIEWS



MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



washing



drying



beware
of salt



beware
of UV



beware
of chemicals



read
instructions

SIZE CHART



SIZE	XS	S	M	L	XL
A [cm]	65-75	70-80	75-85	80-90	85-95
A [in]	25,5-29,5	27,5-31,5	29,5-33,5	31,5-35,5	33,5-37,5
B [cm]	49	52	55	58	60
B [in]	19	20,5	21,5	23	23,5