

↑ SPINEL

Fully adjustable four buckles sit harness ideal for mountaineering and winter climbing.

DESCRIPTION

Two buckles in a waist belt enable to center the harness, keeping the gear loops in an optimal position.

Belay loop 12 mm wide with strength 15 kN.

Abrasion resistance fabric at tie-in points for longer lifetime of the harness.

Patented 16 mm wide stainless steel Rock & Lock buckles on the leg loops enable fast adjustment.



Rear haul loop with a load capacity 30 kg.

2 slots with easier placement for additional carabiner PORTER.

Ergonomic braided gear loops are shaped to facilitate easy handling and to provide enough space for your climbing gear.

Unique, patented Rock&Lock buckle is made of stainless steel to increase corrosion resistance.

For both leg loops and waist belt the variable width webbing is used. On leg loops it goes from 16 mm to 40 mm wide inside padding for maximum comfort.

KEY FEATURES

- Ergonomic construction combines maximum comfort and low weight.

STANDARDS

CE 1019
EN 12277, type C

FEATURES



UIAA



size M/L
430 g








3 YEARS
guarantee

MATERIALS




- 66 % PAD
- 16 % steel
- 11 % EVA foam
- 7 % PES

TECHNICAL DATA

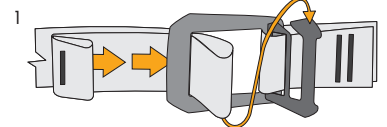

TECHNICAL DATA

Power distribution at the waist:

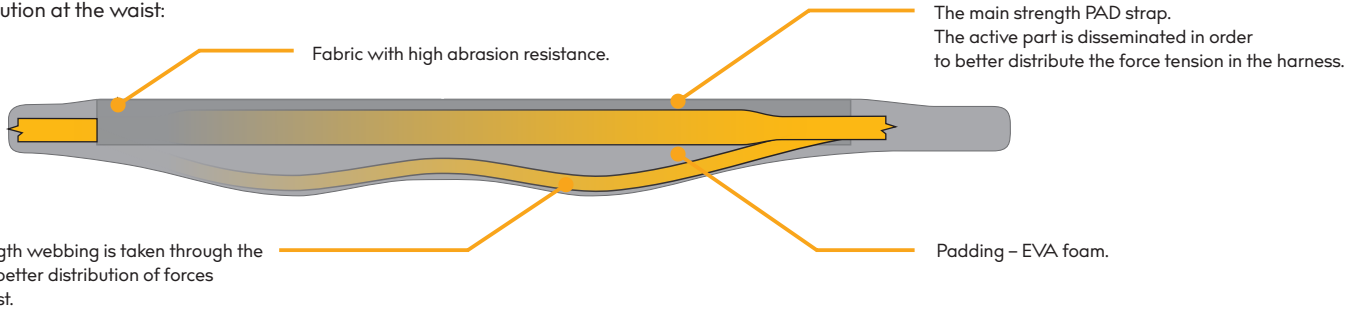

COMPARISON

SPINEL C5062 (old) vs. SPINEL C5074 (new)

- More durable reinforced tie-in points for longer lifetime of the harness.
- More durable and comfortable solution of slots for PORTER.
- 20 g lighter.
- New Rock&Lock buckles on leg loops are 16 mm wide. Variable webbing is still 40 mm wide inside padding for maximum comfort.



SPINEL C5062

OTHER VIEWS



MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



washing



drying



beware of salt



beware of UV



beware of chemicals



read instructions

SIZE CHART



SIZE	XS	S	M	L	XL	XXL
A [cm]	65-80		75-90		85-100	
A [in]	25.5-31.5		29.5-35.5		33.5-39.5	
B [cm]	50-55		60-65		65-70	
B [in]	19.5-21.5		23.5-25.5		25.5-27.5	