



STORM DRY 9.8

Water resistant single rope with great balance in weight, durability and use. Perfect choice for all-round climbing.

DESCRIPTION


The rope is very compact, durable and pleasant to use.

Teflon treatment – TEFLON® Eco is applied on ropes by revolutionary nanotechnology which makes the top of the line impregnated ropes, this treatment gives the rope longer lifetime and water resistance.

Ultrasonic ending and thermo-transfer end marking.

LENGTH

pack: 30–80; 100 m
spool: 200 m

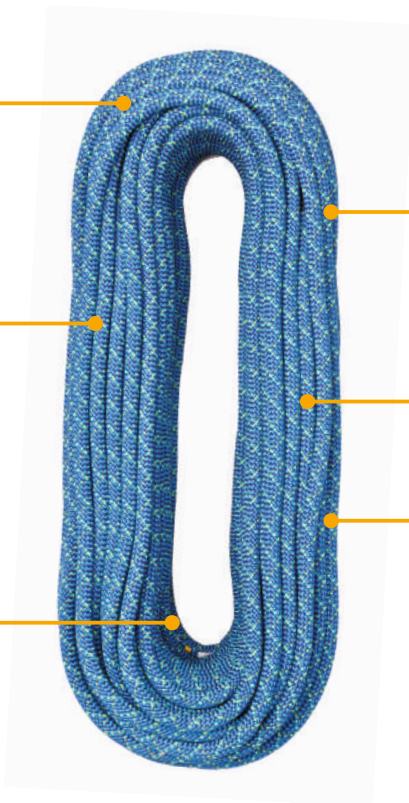

Narrow diameter and higher UIAA fall rating (UIAA falls 9) help you to improve your climbing achievements.

Middle marking.

Ideal for all-round climbing, training hard routes and RP ascents.

KEY FEATURES

- TEFLON® Eco treatment
- great handling, low-weight and high durability

STANDARDS

CE 1019
EN 892 UIAA

FEATURES



9.8 mm



single rope




2 YEARS warranty



UIAA

MATERIALS



● 100 % PAD

TECHNICAL DATA

| | |
|--------------------------|-----|
| sheath slippage [%] | 0.1 |
| rope diameter [mm] | 9.8 |
| number of UIAA falls min | 9 |
| max. impact force [kN] | 9.1 |
| static elongation [%] | 7.9 |
| dynamic elongation [%] | 35 |
| weight [g/m] | 65 |

